


## Components, Spares and Accessories for Double Joints

### Series 0.400

up to MdLim 6.100 Nm

#### Cross Units

Angle of deflection up to max. 55 °,  
Hub or Fork Shafts Connection  
Torque range up to max. 6.100 Nm

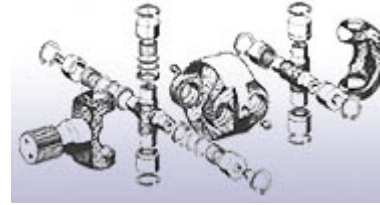

### Series 0.500

up to MdLim 16.900 Nm

#### Cross Units

Angle of deflection up to max. 50 °,  
Fork Shafts Design  
Torque range up to max. 16.900 Nm

