



MCHY series

180° ANGULAR GRIPPER - Cam style

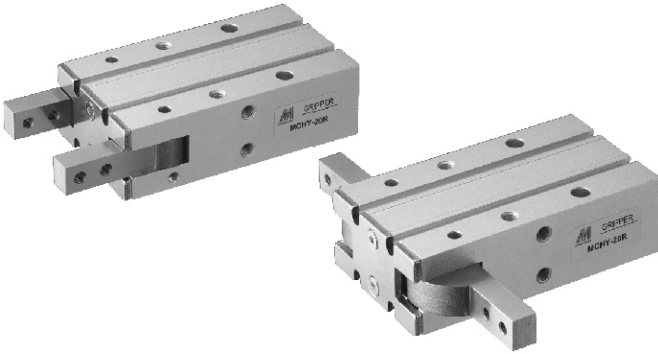

Order example:

MCHY-16 D 1 - RT × 1



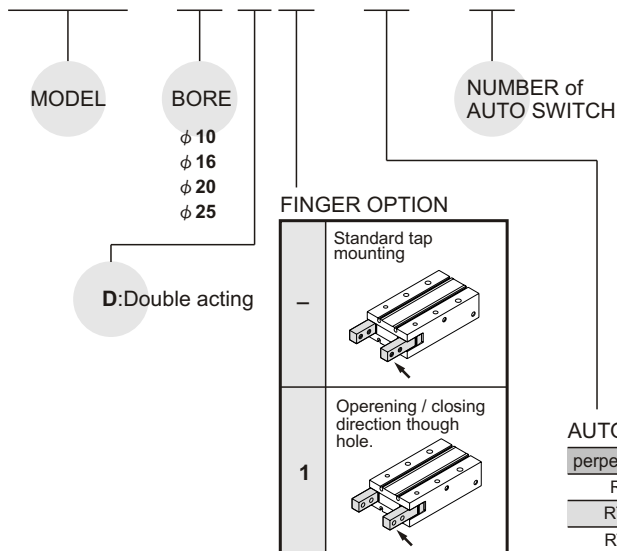


Features:

- Compact design and light weight.
- Gripping forces via piston / cam design.
- Precision reference points on body and fingers are standard.
- Auto switch mounting at 4 locations.
- Resistant to dusty environments.


Specification:

Model	MCHY			
Acting Type	Double Acting			
Tube I.D. (mm)	10	16	20	25
Medium	Air			
Operating pressure range	1~6 kgf/cm ²			
Ambient temperature	- 10~ + 60°C (No freezing)			
Repeatability (mm)	± 0.2			
Max. operating frequency(c.p.m)	60			
Lubrication	Not required			
Effective force (Nm) at (5kgf/cm ²)	0.16	0.54	1.10	2.28
Operating angle (both sides)	Opened side	180°		
	Closed side	-3°		
Weight (g)	80	150	320	600

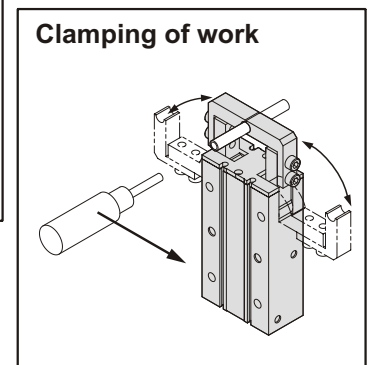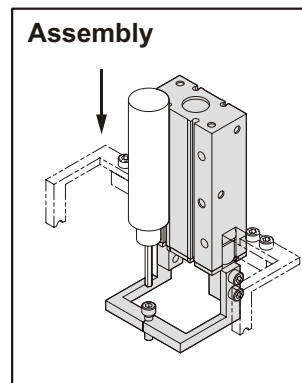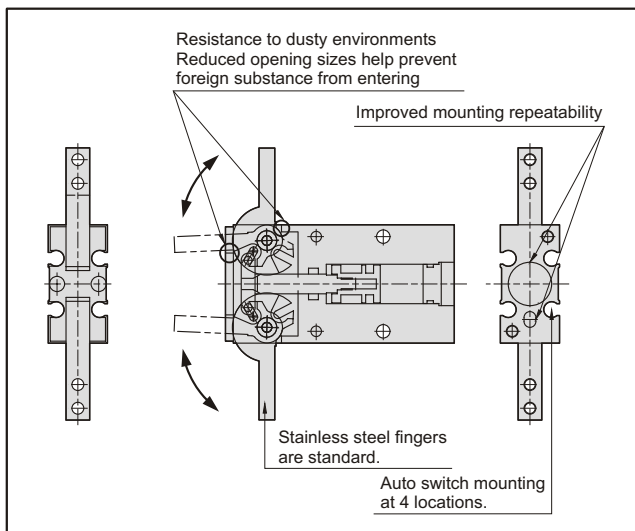

Mounting


Axisl mounting (body tapped)

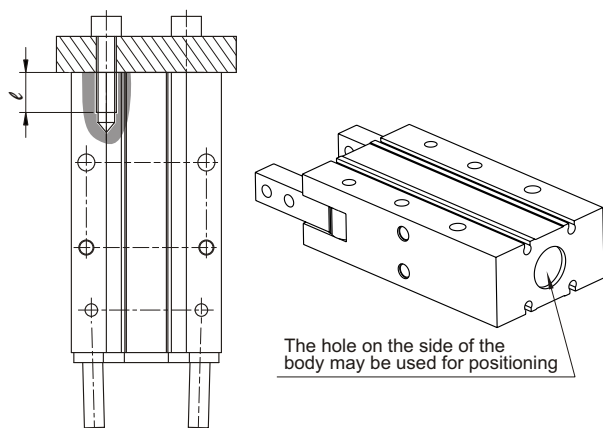

Model	Bolt	Max.torque N.m	Max.screw depth ℓ (mm)
MCHY-10	M3×0.5	0.88	6
MCHY-16	M4×0.7	2.1	8
MCHY-20	M5×0.8	4.3	10
MCHY-25	M6×1	7.3	12


Model	Hole diameter (mm)	Height (mm)
MCHY-10	$\phi 11H9^{+0.043}_{-0}$	1.5
MCHY-16	$\phi 17H9^{+0.043}_{-0}$	1.5
MCHY-20	$\phi 21H9^{+0.052}_{-0}$	1.5
MCHY-25	$\phi 26H9^{+0.062}_{-0}$	1.5

Lateral mounting (body tapped)

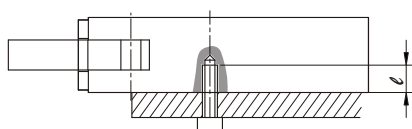


Model	Bolt	Max.torque N.m	Max.screw depth ℓ (mm)
MCHY-10	M3×0.5	0.88	6
MCHY-16	M4×0.7	2.1	8
MCHY-20	M5×0.8	4.3	10
MCHY-25	M6×1	7.3	12

Lateral mounting (body through hole)

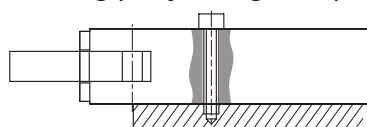


Model	Bolt	Max.torque N.m
MCHY-10	M3×0.5	0.88
MCHY-16	M4×0.7	2.1
MCHY-20	M5×0.8	4.3
MCHY-25	M6×1	7.3

Vertical mounting (body tapped)

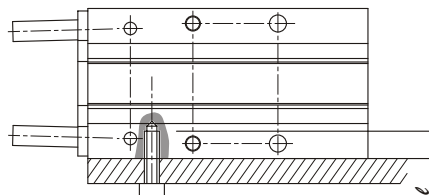

Model	Bolt	Max.torque N.m	Max.screw depth ℓ (mm)
MCHY-10	M3×0.5	0.59	4
MCHY-16	M4×0.7	1.3	5
MCHY-20	M5×0.8	3.3	8
MCHY-25	M6×1	5.9	10

How to mount attachment on fingers

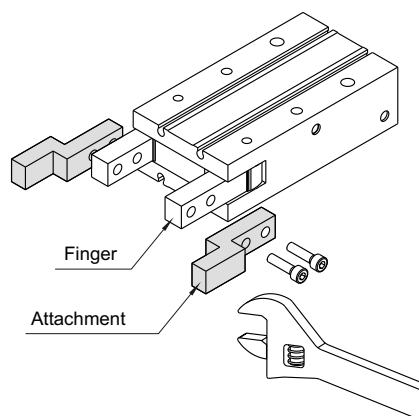

- To mount an attachment to a finger, make sure to use a wrench to support the attachment so as not to apply undue strain on the finger.
- Refer to the table below for the proper tightening torque on the bolt used for securing the attachment to the finger.

Model	Bolt	Max.torque N.m
MCHY-10	M3×0.5	0.59
MCHY-16	M4×0.7	0.59
MCHY-20	M5×0.8	1.4
MCHY-25	M6×1	2.8

Effective holding force

Indication of effective holding force

1. Although the condition differs according to the coefficient of friction between the attachment and work, select a model that can produce a holding force of 10 to 20 times the work.
2. Further allowance should be provided when great acceleration or impact is expected during work transfer.

Ex.)


For setting the holding force to be at least 20 times the work weight;

Required holding force = $0.05\text{kg} \times 20 \times 9.8\text{m/s}^2 = 10\text{N}$ min.





When MCHY-16 is selected, the holding force is determined to be 17N according to the holding point distance ($L = 30\text{mm}$) and the pressure (5kgf/cm^2).

3. The holding force shown in the tables represents the holding force of one finger when all fingers and attachments are in contact with the work.

L: Holding point distance F: Thrust of one finger


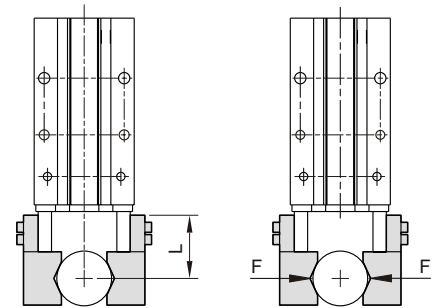


External hold

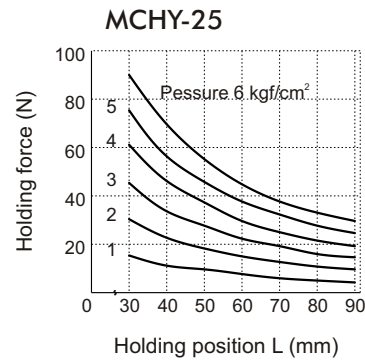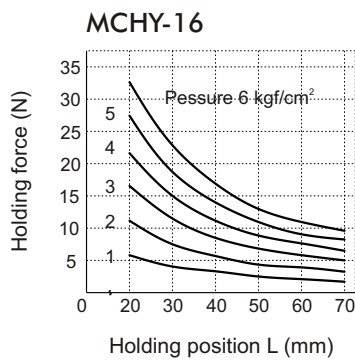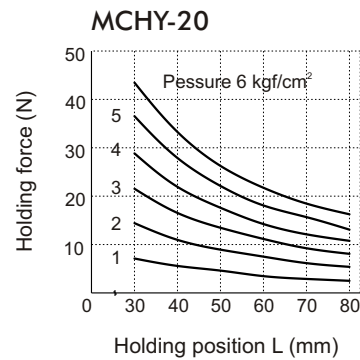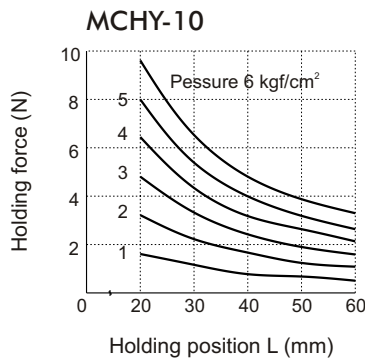


Confirmation of holding point

Work should be held at a point within the range of overhanging distance (H) for a given pressure indicated in the tables. When the work is held at a point outside of the recommended range for a given pressure, it may cause adverse effect on the product life.

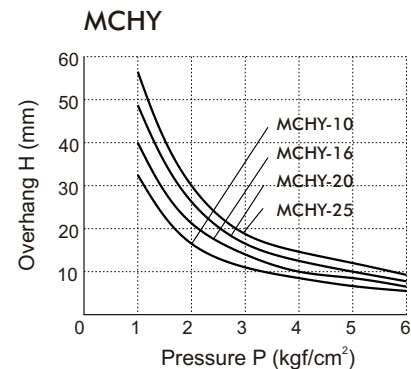
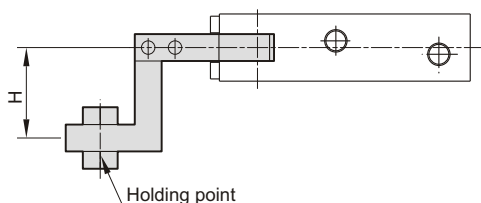


MCHY Dimensions $\phi 10 \sim \phi 25$


180° ANGULAR GRIPPER - Cam style

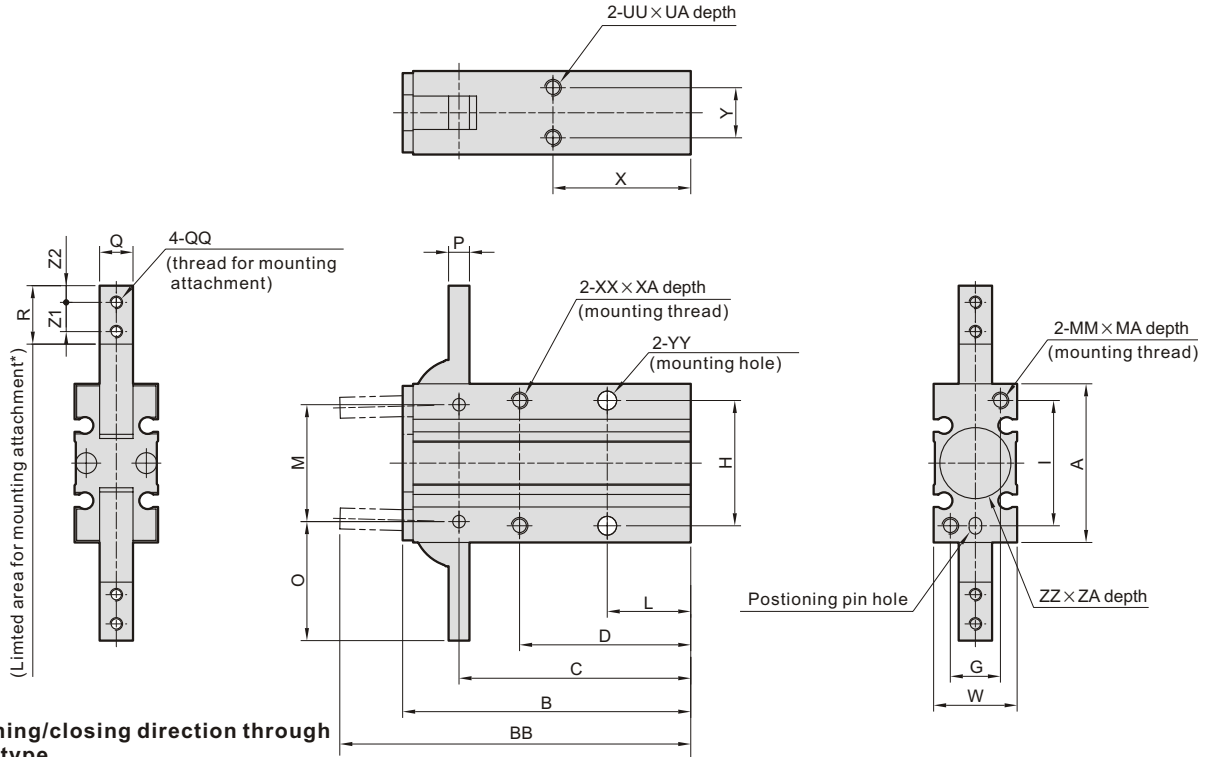

Opening/closing direction through hole type

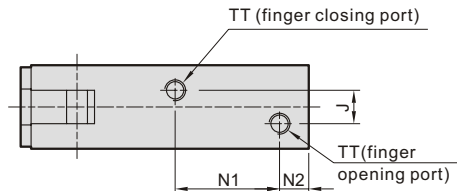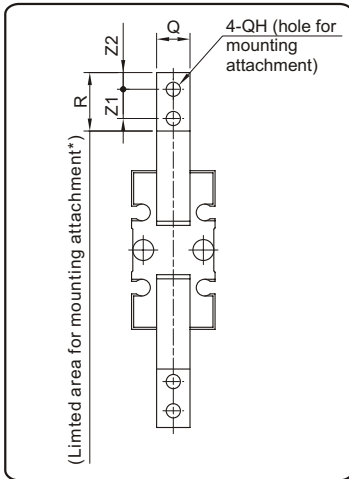

Auto switch mounting groove position



*Do not extend the attachment from limited area for mounting to avoid interference with the attachment or main body.

Code Tube I.D.	A	B	BB	C	D	EE	EA	EB	ED	F	G	H	I	J	K	L	M	MA	MM	N1	N2	O	P	Q	QH	QQ
10	30	58	71	47.5	35	3H9 ^{+0.025} ₋₀	3	4	9	2	9	24	24	3	13	18	22	6	M3×0.5	23	7	23.5	4	6 ^{-0.005} _{-0.025}	φ 3.4	M3×0.5
16	38	69	84	55.5	41	3H9 ^{+0.025} ₋₀	3	4	15	2.5	12	30	30	8	18	20	28	8	M4×0.7	25	7	28.5	5	8 ^{-0.005} _{-0.025}	φ 3.4	M3×0.5
20	48	86	106	69	50	4H9 ^{+0.030} ₋₀	4	5	19	3	16	36	38	12	20	25	36	10	M5×0.8	32	8	37	8	10 ^{-0.005} _{-0.025}	φ 4.5	M4×0.7
25	58	107	131	86	60	4H9 ^{+0.030} ₋₀	4	5	23	3	18	42	46	14	24	30	45	12	M6×1	42	8	45	10	12 ^{-0.005} _{-0.025}	φ 5.5	M5×0.8

Code Tube I.D.	R	TT	UA	UU	W	X	XA	XX	Y	YY	ZA	ZZ	Z1	Z2
10	12	M5×0.8	4	M3×0.5	15	30	6	M3×0.5	9	φ 3.4	1.5	φ 11H9 ^{+0.043} ₋₀	6	3
16	14	M5×0.8	5	M4×0.7	20	33	8	M4×0.7	12	φ 4.5	1.5	φ 17H9 ^{+0.043} ₋₀	7	4
20	18	M5×0.8	8	M5×0.8	26	42	10	M5×0.8	14	φ 5.5	1.5	φ 21H9 ^{+0.042} ₋₀	9	5
25	22.5	M5×0.8	10	M6×1	30	50	12	M6×1	16	φ 6.6	1.5	φ 26H9 ^{+0.042} ₋₀	12	6