



MS* series Socket COUPLER




MSM (Male screw)

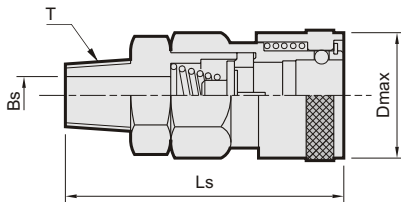


MSF (Female screw)

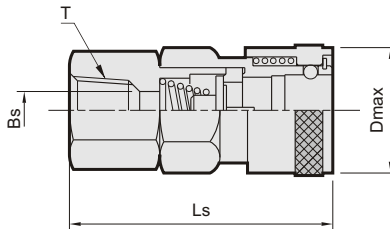

MSH (Hose screw)

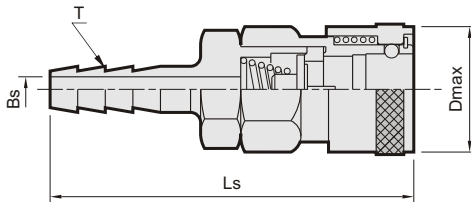

MSP (Nut style)

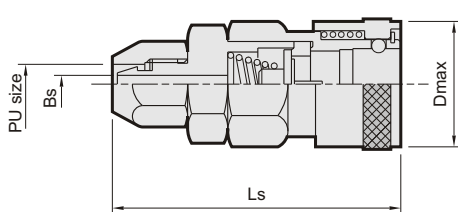

Order example:

MSM - 20 - A - S

MODEL:

MSM	
MSF	
MSH	
MSP	

20: PT 1/4"
30: PT 3/8"
40: PT 1/2"

MATERIAL
S: Steel
B: Brass
SS: Stainless Steel

A: One touch type
(no code): Standard type

Model	Screw size T	Dimension (mm)			Weight (g)		
		Bs	D _{max}	Ls	Steel	Brass	Stainless steel
MSM-20	PT 1/4"	φ 7.5	φ 25	55.5	95	104	95
MSM-30	PT 3/8"	φ 7.5	φ 25	57.5	100	109	100
MSM-40	PT 1/2"	φ 9	φ 25	59.5	110	117	111

Model	Screw size T	Dimension (mm)			Weight (g)		
		Bs	D _{max}	Ls	Steel	Brass	Stainless steel
MSF-20	PT 1/4"	φ 7.5	φ 25	52.5	104	110	107
MSF-30	PT 3/8"	φ 7.5	φ 25	54.5	103	111	108
MSF-40	PT 1/2"	φ 9	φ 25	54.5	122	131	123

Model	Hose size T	Dimension (mm)			Weight (g)		
		Bs	D _{max}	Ls	Steel	Brass	Stainless steel
MSH-20	5/16"Hose	φ 5	φ 25	72.5	95	104	98
MSH-30	3/8"Hose	φ 7.5	φ 25	76.5	100	106	99
MSH-40	1/2"Hose	φ 9	^{Hex} 26/30	78.5	110	117	112

Model	PU size ID × OD (mm)	Dimension (mm)			Weight (g)		
		Bs	D _{max}	Ls	Steel	Brass	Stainless steel
MSP-20	5 × 8	φ 4	φ 25	56.5	100	106	
MSP-30	6.5 × 10	φ 5	φ 26	58	110	116	
MSP-40	8 × 12	φ 6	φ 26	59	110	116	