


# MY\* series

## 2/2 WAY N.C. Y TYPE PISTON SERIES SOLENOID VALVE



### Specification :

- Y type forged brass body
- IP65 100% ED coil
- PTB approval EExmIIT4 coil

### Power consumption:



Coil power	4	5	3E
AC(VA)	17.6/15.4	33/23	9.2
DC(W)	15	18.5	10

### Dimensions:

Model	MYA/MYS	
Code	10	15
Dimension (mm)		
H	118.0	
L	95.0	
N	59.0	
W	13.0	
N.W.(Kg)	0.55	

### Order example:

**MYA - 10 - N - C - 4 - □ - AC**

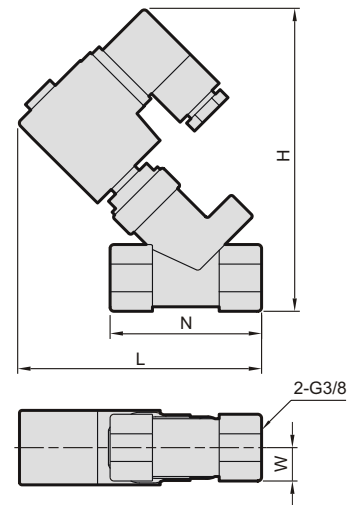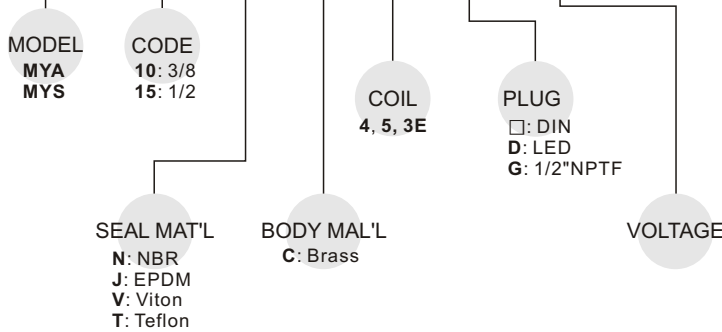

### Specification:

Model MYA: for water, air and higher temp. fluids																
PIPE G	Code no.	Seal mat'l	Coil	Orifice mm	Temp. 5~°C						Working press. bar				CV	
					Coil 4			Coil 5/3E			Coil 4		Coil 5			Coil 3E
					N	J	V	N	J	V	AC	DC	AC	DC		AC/DC
3/8	10	N, J, V	4, 5, 3E	12	95	120	95	145	0.3~16	0.3~10	0.3~20	0.3~12	0.3~5	1.9		
1/2	15				2.6											

Model MYS: for steam and high temp. fluids														
PIPE G	Code no.	Seal mat'l	Coil	Orifice mm	Temp. 5~°C				Working press. bar					CV
					Coil 4/3E		Coil 5		Coil 4		Coil 5		Coil 3E	
					AC	DC	AC	DC	AC	DC	AC/DC			
3/8	10	T*	4, 5, 3E	12	158	185	0.3~5	0.3~2	0.3~10	0.3~7	0.3~5	1.9		
1/2	15				2.6									

\* Teflon seal will have 400cc/min. down gas leakage.