

# Multi-Circuit Rotary Block

Package : 1 pc. in a bag

- The Multi-Circuit Rotary Block is best suited to piping for index tables or other rotary equipment.
- A single block can serve 4 circuits, 6 circuits or 8 circuits.

## Specifications

Fluid admitted	Air, Vacuum	
Service pressure range	0~150psi	0~0.9MPa(0~9.18kgf/cm <sup>2</sup> )
Negative pressure	-29.5in.Hg	-750mmHg(10Torr)
Service temperature range	32~140°F	0~60°C

## Model Designation(Example)

RB ① 4 ② - M5 ③

①Type

②Number of circuits

Code	4	6	8
No. of circuits	4 circuits	6 circuits	8 circuits

③Joint thread size

	Metric thread		Taper pipe thread
Code	M5	M6	01
Size	M5×0.8	M6×1.0	R1/8

## Detailed Safety Instructions


Before using the PISCO device, be sure to read the "Safety Instructions", "Common Safety Instructions for Products Listed in This Manual" on page 3 and "Common Safety Instructions for Quick-Fitting Joint" on pages 4 and 5.

## ⚠ Caution

1. Some working conditions may not permit the use of Multi-Circuit Rotary Block. Contact PISCO for information.

## RB

Multi-Circuit Rotary Block

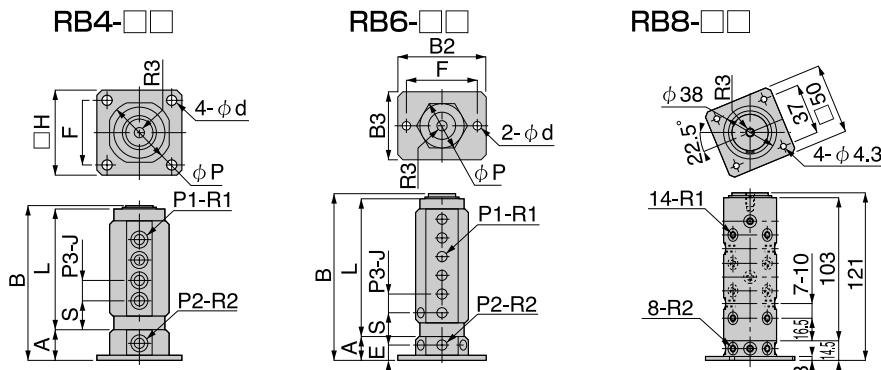

Unit : inch

Model	R1	R2	R3	A	B1	B2	B3	L	ΦP	J	S	E	□H	Φd	F	P1	P2	P3
RB 4-M5	M5	M5	M5	0.51	2.79	-	-	2.16	0.91	0.39	0.49	0.31	1.26	0.18	0.94	0.31	0.16	0.12
RB 4-01	R1/8	R1/8	-	0.73	3.58	-	-	2.76	1.50	0.49	0.63	0.41	1.97	0.22	1.50	0.28	0.16	0.12
RB 6-M5	M5	M5	M5	0.59	3.76	1.89	1.42	3.17	1.02	0.41	0.49	0.33	-	0.22	1.50	0.43	0.24	0.20
RB 6-M6	M6	M6	-	0.57	3.84	1.57	2.05	3.15	-	0.43	0.49	0.33	-	0.22	1.65	0.43	0.24	0.20
RB 8-M5	M5	M5	M6	0.57	4.76	-	-	4.05	1.50	0.39	0.65	-	1.97	0.17	1.46	0.55	0.31	0.28
RB 8-M6	M6	M6	M6	0.57	4.76	-	-	4.05	1.50	0.39	0.65	-	1.97	0.17	1.46	0.55	0.31	0.28